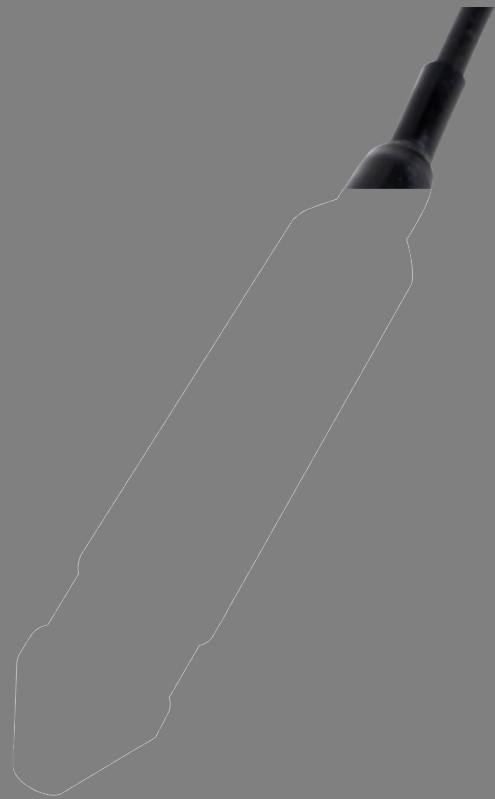

L606

/

10

316L

IP68
OEM



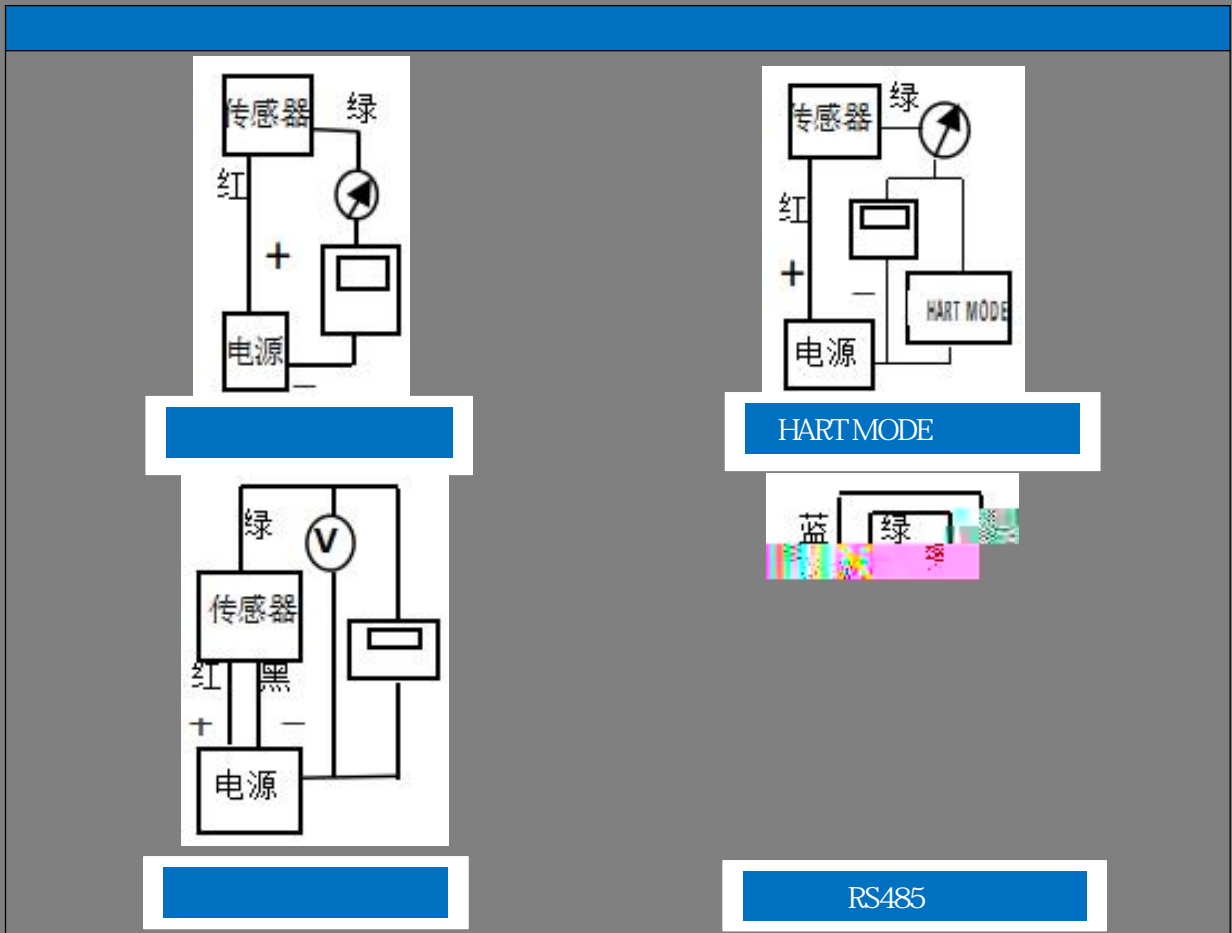
...



L606						
0-1 ...200						
$\leq \pm 0.5\%F.S(\quad)$ $\leq \pm 0.25\%F.S(\quad)$						
4~20mA	1~5V/0~5V	0~10 V	0.5~4.5V	SDI-12	RS485 Modbus RTU	
7~30V DC	8~30V DC	15~30V DC	5V DC $\pm 5\%$	12V DC	10~30V DC	
-30 ~70						
-40 ~85						
0 50						
316L						
IP68						
0.02%FS/ $\leq 100\text{kPa}$, 0.01%FS/ $> 100\text{kPa}$						
$\leq 0.1\%F.S/$						
	316					
/	316					
	PE		PUR/PTFE			
$\leq 10\text{ms}$						
200%F.S.						
300%F.S						
$> 100\text{M } \Omega @ 100\text{V DC}$						

L606防泥沙液位传感器

mm



606

0-1...200

G= A=

E0=1-5V (3)	E5= 4-20mA(2)	E6=0-5V (3)
E7=0-10V(3)	E8=0.5-4.5V(3)	E11= RS485(MODBUS)
E16=SDI-12	X=	

S3=24V DC	S5=12V DC	S6=5V DC	S9=15~30VDC
S10=12~30V DC	S11=7~30V DC	S12=8~30VDC	S17=10~30V DC

W= X=

A1=0.5%F.S A2=0.25%F.S()

001=1	002=2	X=	
-------	-------	----	--

N=
LP=
AW=

606	100	G
-----	-----	---

